


# GRIND ASSIST TABLE

BULLETIN GA-10

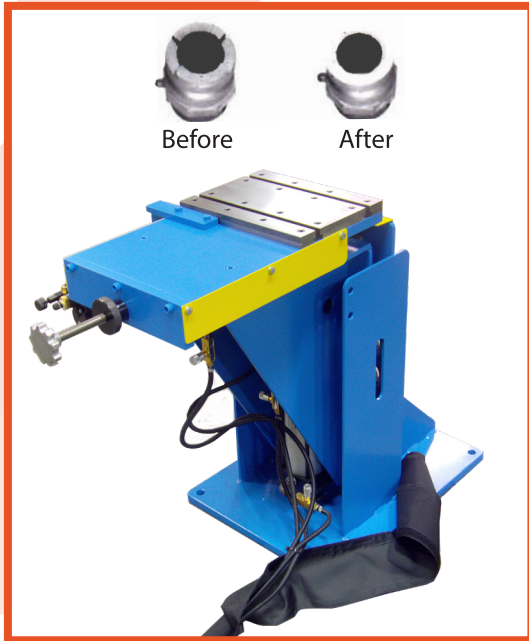

## Standard Specifications

- 3 1/4" Bore x 9" stroke air cylinder for up and down movement.
- 2" Bore x 3" stroke air cylinder for in and out movement.
- Adjustable infeed stop with lock for grind depth control.
- Air control panel with manual valves, regulators and gages. Panel can be mounted on either side.
- Adjustable stop on table height for in and out plunge grinding.
- Tee-Slotted Table top (not shown).

## Options

- Hydro-check
- Air Logic controls

Always wear eye protection when grinding. Be sure all guards are in place.

For pressure Grinding Adaptable to Existing Equipment  
Or – Available With New G+P Grinders For Use with  
Abrasive Belts Only

## Do Not Use with Grinding Wheels

Using With Grinding Wheels May Result In Serious Injury



**GRINDING & POLISHING MACHINERY CORPORATION**

2801 TOBEY DRIVE / INDIANAPOLIS, IN 46219

PHONE (317) 898-0750 • FAX (317) 899-1627